


CODE: **ISFG64** v.1.0/II
 TYPE: **Industrial switch ISFG64 (4xPoE, 2xSFP)**

EN

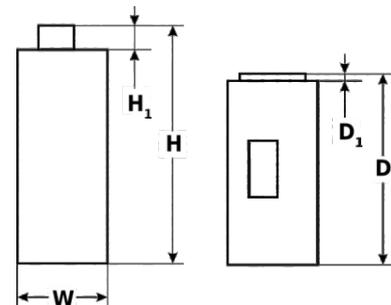

Features:

- 6 ports industrial switch
- 4 PoE ports 10/100/1000 Mb/s (1+2 ports) (data and power supply)
- 2 ports 100/1000 Mb/s SFP
- 30 W for each PoE port, supports devices compliant with the IEEE802.3af/at (**PoE+**) standard
- Supports auto-learning and auto-aging of MAC addresses (8K size)
- **Possibility of redundant power supply**
- Mounting on a DIN rail (TH35)
- LED indication
- warranty – 2 year from the production date

DESCRIPTION

ISFG64 is a 6-ports PoE switch designed to supply IP cameras operating in IEEE 802.3af/at standard. Automatic detection of any devices powered in the PoE/PoE+ standard is enabled at the 1 – 4 ports of the switch. UP LINK ports (marked 5 and 6) are used to connect further network devices using fiber optics (using SFP modules - GBIC). On front panel there is LEDs signaling of the device's status (description in table below). Device has solutions that allow it to be powered from two sources (emergency power supply, redundant power supply) – in case of a failure of one source, it immediately switches to backup one.

The PoE technology ensures a network connection and reduces installation costs by eliminating the need to supply a separate power cable for each device. This method allows supplying other network devices, such as IP phone, wireless access point or router.

TECHNICAL PARAMETERS

Ports	4 ports 10/100/1000 Mb/s (PoE) 2 ports 100/1000 Mb/s (UP LINK) with connection speed auto-negotiation and MDI/MDIX Auto Cross)
PoE power supply	IEEE 802.3af/at (1+4 ports), 52 V DC / 30 W at each port *
Protocols, Standards	IEEE802.3, 802.3u, 802.3x CSMA/CD, TCP/IP
Bandwidth	12 Gbps
Transmission method	Store-and-Forward
Optical indication of operation	Switch power supply; Link/Act; PoE Status
Power supply	Switch: 12-57 V DC; 2 A max. PoE: 48-57 V DC; 2 A max.
Self-power consumption	5 W max.
Operating conditions	temperature -30°C ÷ 70°C, relative humidity 5% - 90%, no condensation
Dimensions	W=30, H=128, H ₁ =10, D=112, D ₁ =8 [+/- 2 mm]
Net/gross weight	0,3 / 0,4kg
Protection class EN 60950-1:2007	I (first)
Storage temperatur	-30°C ÷ 70°C
Declarations, warranty	CE, 2 year from the production date

* The given value of 30 W per port is the maximum value. The total power consumption should not exceed 96 W.

Connection schemes

